


Paver Supports

Fixed Height Paver Supports

Fixed height paver supports are designed for use on flat roofs and trafficable deck surfaces to transform them into properly drained, ventilated and elevated terraces.

The paving support comes complete with the exclusive WB5 balancers which automatically provide the adjustment to balance the pavers in case of a difference in level.

An advantage of the paver supports is they form part of the acceptable solution for exterior trafficable decks. These supports are quick and easy to install, they allow a wide variety of surface finishes and easy access back to the waterproofing membrane.

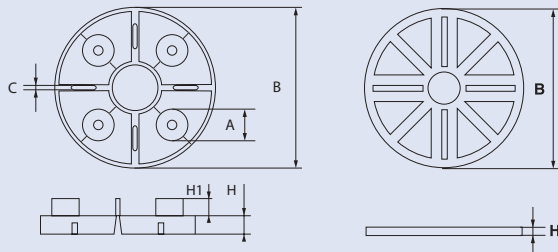

| Dimensions | | | | | |
|------------|----|-----|---|----|----|
| | A | B | C | H | H1 |
| WF15 | 30 | 140 | 3 | 15 | 12 |
| WF20 | 30 | 150 | 4 | 20 | 18 |
| WL3 | - | 150 | - | 3 | - |
| WB5 | - | - | - | 5 | - |

| Quantity of supports required | |
|-------------------------------|---------------------------|
| Size of pavers | Quantity / m ² |
| 500x500 mm | 4 supports |
| 400x400 mm | 6.25 supports |
| 300x300 mm | 11.11 supports |

Note: If different sizes are required, please contact our office on +64 6 357 9148.

Paver stands are ideal for installation directly onto waterproofing membranes. Having pavers supported, rather than adhered to the membrane provides space for running leads or services underneath pavers, and also provides easy access to the membrane in the case of repairs being required.